RYUNIX



ZENKAI RX1

BRACKET STEERING WHEEL

MANUAL BOOK

ryunix.id www.ryunix.id

ZENKAI RX1 MANUAL BOOK

EN

1. Attention

- Install and use the stand according to the instructions.
- Don't store the stand in humid conditions, high temperatures or dusty locations.
- The stand structure is flexible, take care of not hurting your hands and fingers when mounting and adjusting it.
- Children should be under adult's supervision when they use the stand.


2. Features

- Fully adjustable support for steering wheel, pedals and gear lever
- Sturdy steel frame for optimum stability, even during the jolts of racing
- Height - adjustable steering wheel support
- Adjustable pedal support angle
- Gearstick bracket can be fitted on the left or right, depending on riding preference
- Non - slip pads for better grip and to avoid scratching the floor
- Easy assembly, instructions included
- Compatible with the main steering wheels, pedals and gear levers on the market (not included)

3. Specifications


Product Material : Carbon Structural Steel Q235
Product Size : ± 56(L) x 9(W) x 64(H) cm (fold)
± 56(L) x 78(W) x 86(H) cm (maximum extension)
Unit Weight : ± 8.4 kg

4. Product Overview

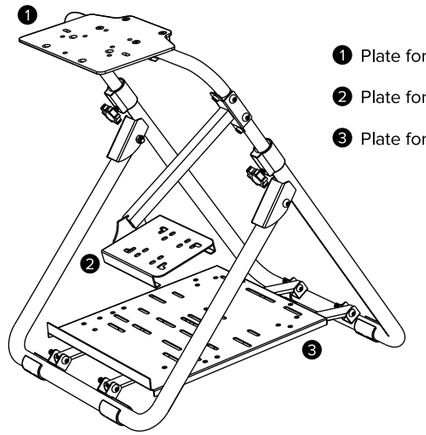

1. Plate for steering wheel
2. Plate for gear lever
3. Plate for pedals


Accessories and Tools




M8*35mm 【2 PCS】 | M6*20mm 【8 PCS】 | M6*12mm 【4 PCS】 | W1 【2 PCS】 | B1 【1 PC】 | B2 【1 PC】


5. Installation Guide

Step 1 :
Loosen the big screw and adjust the plate to the preferred position, then tighten it again.

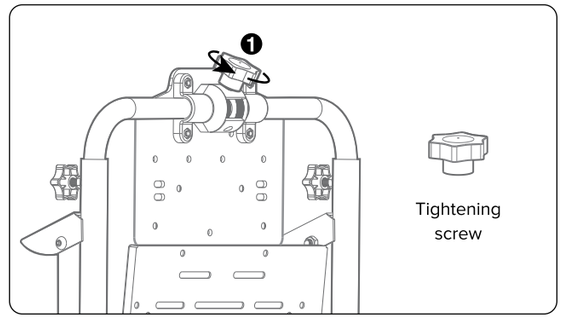


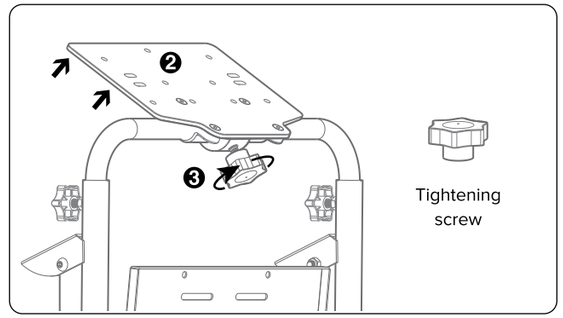

Step 2 :
Unfold the stand and adjust the support bars to the preferred length, then tighten the screws.

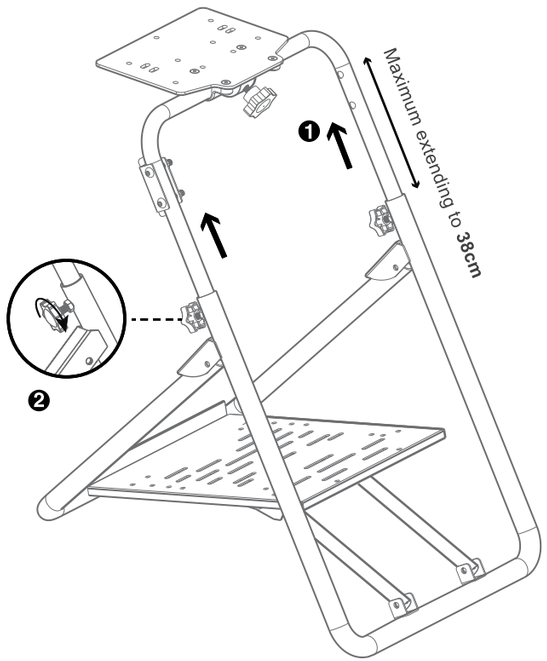


Step 3 :
Optional : attach the gear lever plate arm using the following screws and tools.

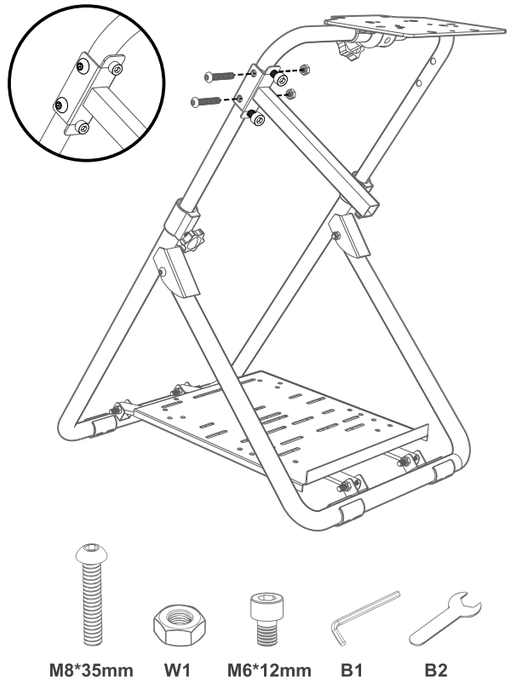


M8*35mm | W1 | M6*12mm | B1 | B2

Step 4 :
Tighten the gear lever plate to the shifter arm.

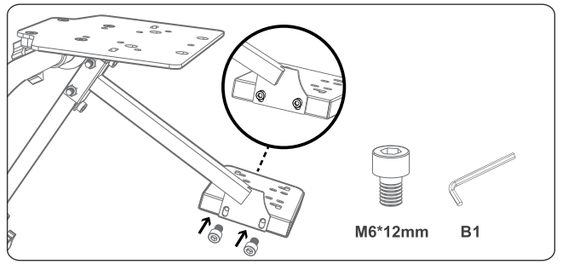

M6*12mm | B1

Step 5 :
When the stand is ready and all screws tightened, you can install a steering wheel, using either a clamp or mounting screws.

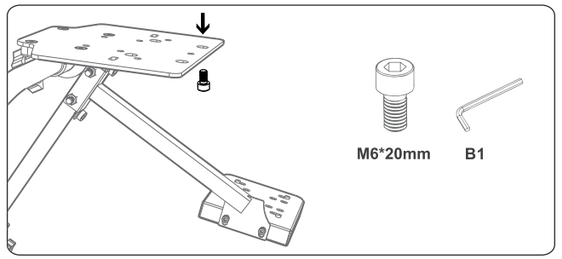

M6*20mm | B1

RYUNIX

ryunix.id

RYUNIX



ZENKAI RX1

BRACKET STEERING WHEEL

MANUAL BOOK

ryunix.id www.ryunix.id

BUKU MANUAL ZENKAI RX1

ID

1. Perhatian

- Pasang dan gunakan penyangga sesuai petunjuk.
- Jangan menyimpan penyangga di tempat yang lembap, bersuhu tinggi, atau berdebu.
- Struktur penyangga fleksibel, berhati-hatilah agar tidak melukai tangan dan jari Anda saat memasang dan menyesuaikannya.
- Anak-anak harus berada di bawah pengawasan orang dewasa saat menggunakan penyangga.


2. Fitur

- Dudukan yang dapat disesuaikan sepenuhnya untuk roda kemudi, pedal, dan tuas persneling
- Rangka baja kokoh untuk stabilitas optimal, bahkan saat guncangan balapan
- Dudukan roda kemudi yang dapat disesuaikan ketinggiannya
- Sudut penyangga pedal yang dapat disesuaikan
- Braket tuas persneling dapat dipasang di kiri atau kanan, tergantung preferensi berkendara
- Bantalan anti selip untuk cengkeraman yang lebih baik dan untuk menghindari goresan pada lantai
- Perakitan mudah, petunjuk disertakan
- Kompatibel dengan roda kemudi, pedal, dan tuas persneling utama di pasaran (tidak termasuk)

3. Spesifikasi


Bahan Produk : Carbon Structural Steel Q235
Ukuran Produk : ± 56(L) x 9(W) x 64(H) cm (terlipat)
± 56(L) x 78(W) x 86(H) cm
(rentang maksimum)
Berat Satuan : ± 8.4 kg

4. Overview Produk

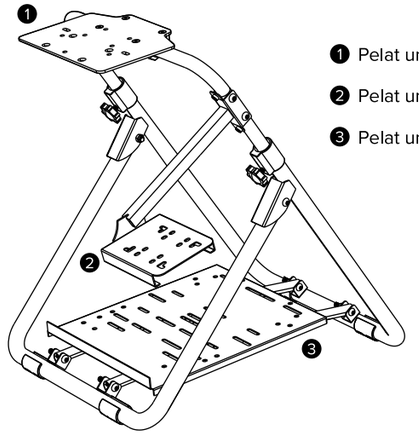

1. Pelat untuk roda kemudi
2. Pelat untuk tuas persneling
3. Pelat untuk pedal


Aksesoris dan Peralatan




M8*35mm 【2 PCS】 **M6*20mm** 【8 PCS】 **M6*12mm** 【4 PCS】 **W1** 【2 PCS】 **B1** 【1 PC】 **B2** 【1 PC】


5. Panduan Instalasi

Langkah 1 :
Longgarkan sekrup besar dan sesuaikan pelat ke posisi yang diinginkan, lalu kencangkan kembali.

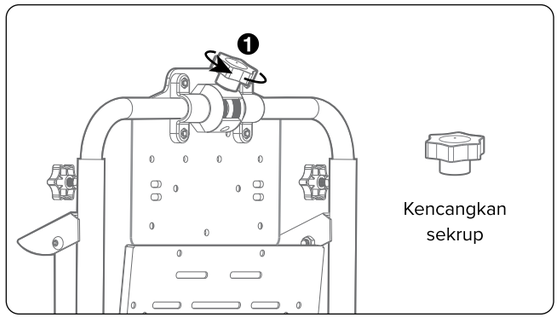


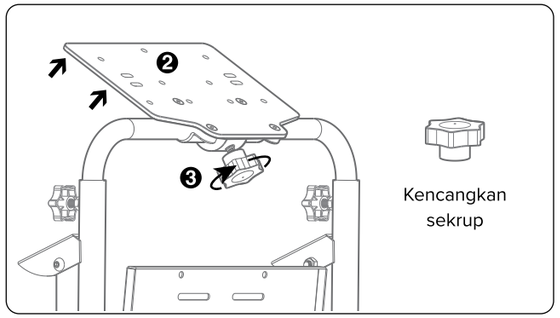

Langkah 2 :
Buka penyangga dan sesuaikan batang penyangga ke panjang yang diinginkan, lalu kencangkan sekrupnya.

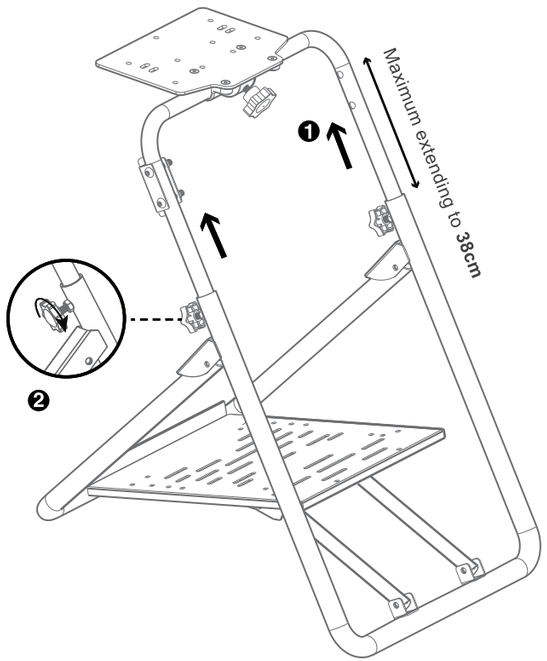


Langkah 3 :
Opsional : pasang lengan pelat tuas persneling menggunakan sekrup dan alat berikut.

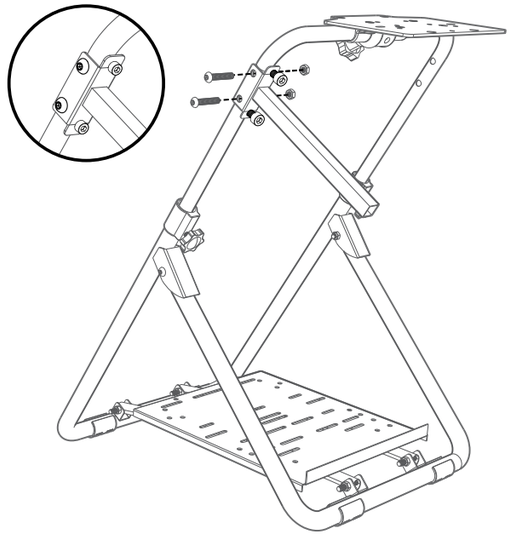


M8*35mm **W1** **M6*12mm** **B1** **B2**

Langkah 4 :
Kencangkan pelat tuas persneling ke lengan pemindah gigi.

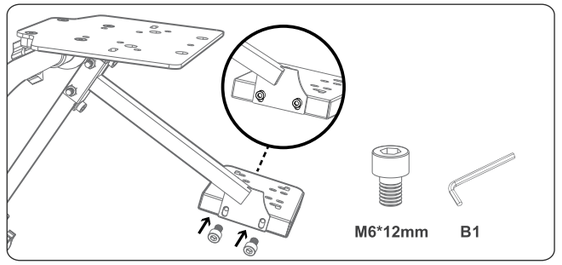

M6*12mm **B1**

Langkah 5 :
Setelah dudukan siap dan semua sekrup dikencangkan, Anda dapat memasang roda kemudi, menggunakan penjepit atau sekrup pemasangan.

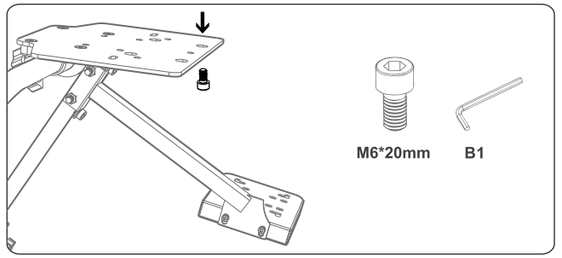

M6*20mm **B1**

RYUNIX

ryunix.id